

## Product Description

ATEK1201 is a connectorized wideband absorptive SPDT switch module with low loss and high isolation. Frequency of operation starts from low frequencies close to DC, goes up to 28 GHz.

RF Input and Outputs are internally matched to 50 ohms for ease of use.

Operating from positive supply voltage and for ease of use the switch state is set by CMOS compatible positive voltage control interface.

Switch is housed in custom milled metal enclosure. Custom package and module options are available upon request.


## Product Features

- Frequency Range: LF - 28 GHz
- Insertion Loss: 2.1 dB at 14 GHz
- IIP3: 40.5 dBm at 10 GHz
- Positive Supply
- 48.9x54x14.2 mm compact size

## Applications

- Wideband Receivers
- Telecommunication
- Test and Measurement
- SATCOM
- SDR

## Functional Block Diagram

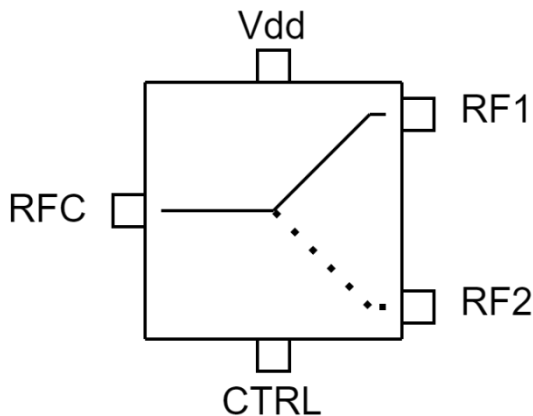

## Electrical Specifications


Conditions unless otherwise specified:  $V_{DD} = 5\text{ V}$ ,  $I_{DQ} = 5.5\text{ mA}$ , Typical,  $T = 25\text{ C}$ , CW.

Parameter		Min	Typ	Max	Units
Operational Frequency Range		LF		28	GHz
Insertion Loss	0.01 GHz		1.1		dB
	4 GHz		1.5		
	10 GHz		2.1		
	16 GHz		2.6		
	22 GHz		3		
	28 GHz		4.2		
Isolation	0.01 GHz		100		dB
	4 GHz		58		
	10 GHz		50		
	16 GHz		45		
	22 GHz		44		
	28 GHz		41		
Input Return Loss			15		dB
Output Return Loss			15		dB
Input IP3			39		dBm
Input P1dB			TBD		dBm
DC Supply Voltage (Vdd)			5		V
DC Supply Current (Vdd & CTRL at 5V)			5.5		mA
DC Supply Current (Vdd at 5V & CTRL at 3.3V)			7.5		mA
Control Voltage (CTRL)	Low		0		V
	High		5		
Operating Temperature		-40		85	°C


## Typical Performance Plots

Conditions unless otherwise specified:  $V_{DD} = 5\text{ V}$ ,  $I_{DQ} = 5.5\text{ mA}$ , Typical,  $T = 25\text{ C}$ , CW.


Insertion Loss

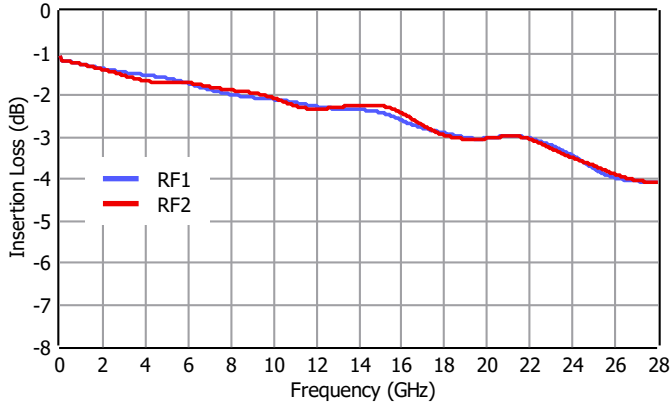


Isolation

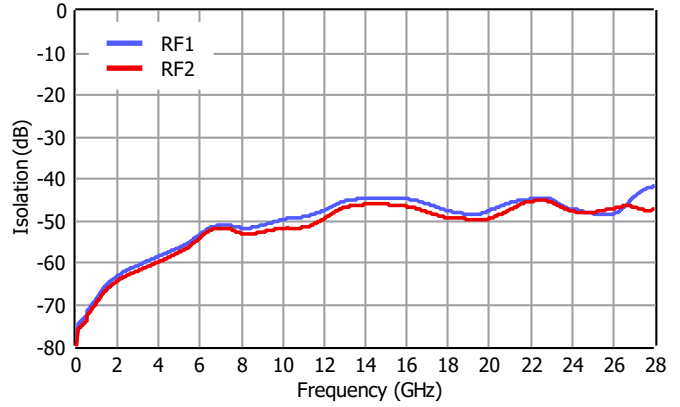

Return Loss

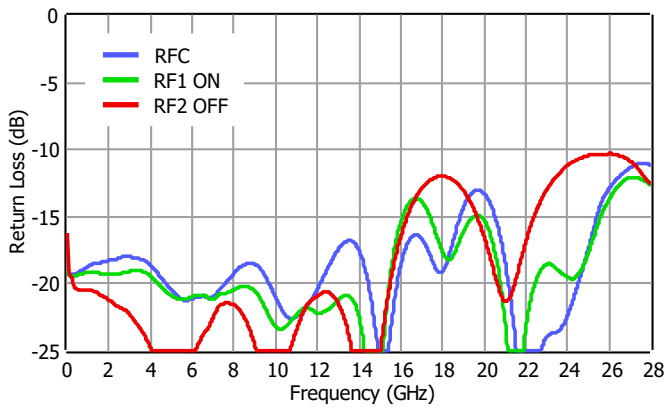

Input IP3

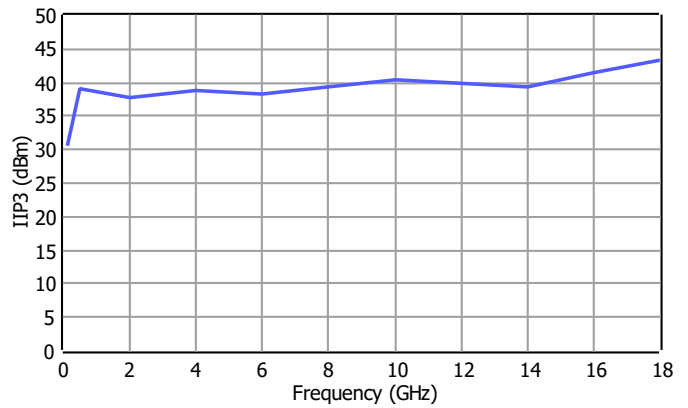

## Control Interface


CTRL	Switch State
HIGH	RF1
LOW	RF2

## Applications Information

Signal entering from RFC goes to RF1 or RF2 depending on the switch state set by the user.

Vdd bias is 5 V and control voltages are CMOS compatible. Switch state can be set by switching control voltages between 0 V to 5 V. Operating the switch is done with positive voltage rails without the need for negative voltage levels.

Typical application schematic to operate the SPDT switch given below.

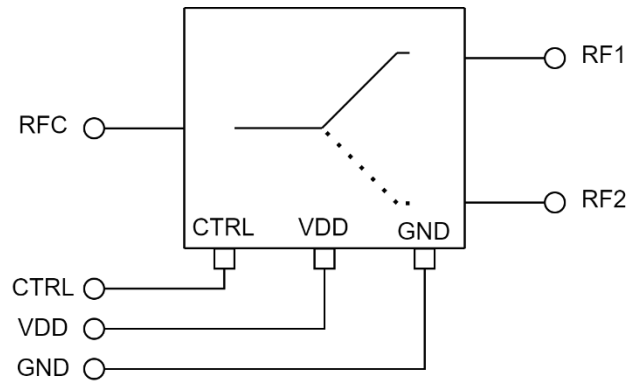


## Absolute Maximum Ratings

Parameter	Value/Range
Supply Voltage (Vdd)	TBD
RF Input Power	TBD
Storage Temperature	-55 to +125°C


Operation of this device outside the parameter ranges given above may cause damage. These conditions should not be applied simultaneously.

## Mechanical and Marking Information

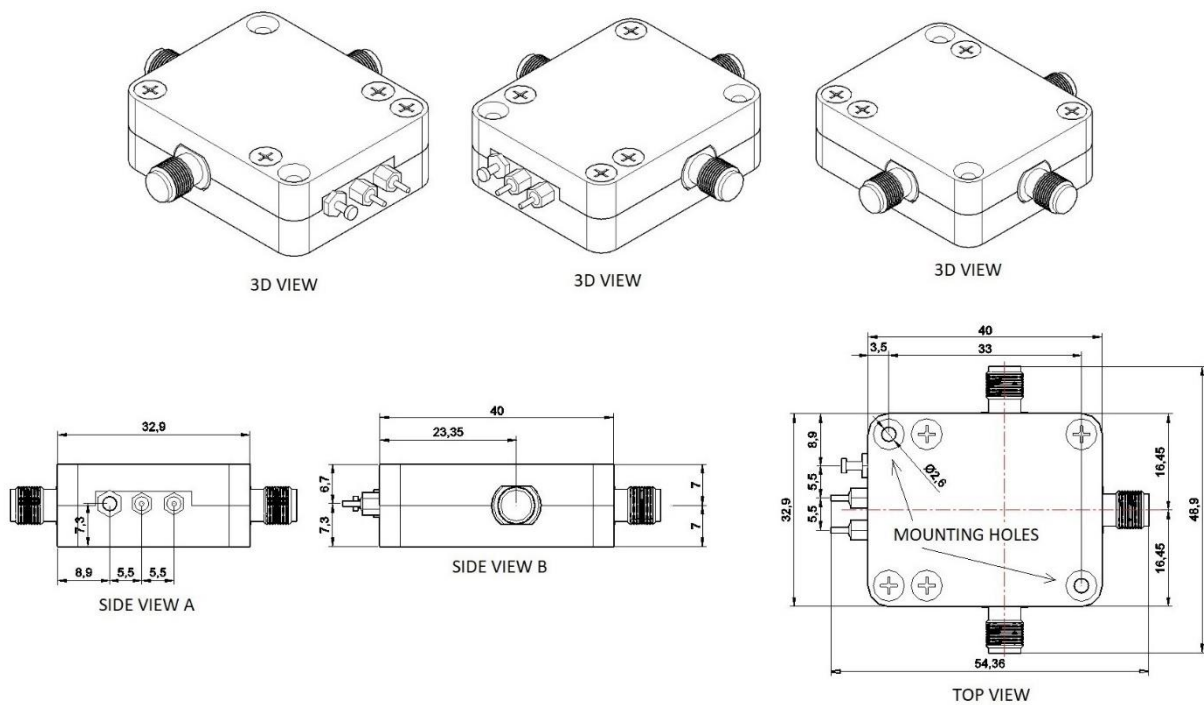

All dimensions are in mm.

2 mounting holes with 2.6 mm radius.

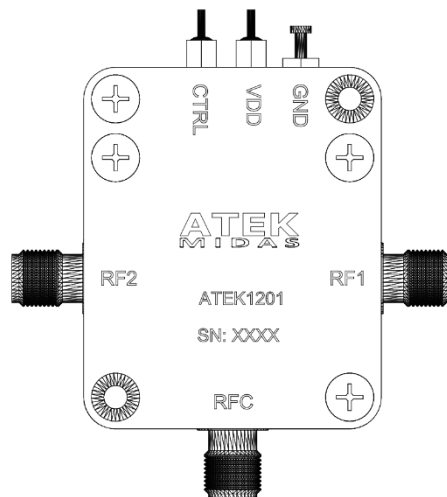

## Handling Precautions



Caution!  
ESD-Sensitive Device  
Handle Accordingly

## Contact Information

For the latest specifications, additional product information, support, and sales.

Web: [www.atekmidas.com](http://www.atekmidas.com)

Tel: +90-212-483-71-67

Email: [support@atekmidas.com](mailto:support@atekmidas.com)

## Notice

This document and its contents are property of ATEK MIDAS. ATEK MIDAS has the right to change the document at any time without notice. ATEK MIDAS distributes this document as a service to its customers. ATEK MIDAS supports its customers to help them create market leader products. Customer is responsible from choosing the product and the configuration the product. This document is provided `as is` and does not provide any warranty.

Customer is responsible for the usage of this document, the information provided in the document and the usage of products. ATEK MIDAS shall have no responsibility from the customer products, customer applications and doings of customers.

## Revisions

Revision No	Revision Date	Revision Reason	Section / Page No
1.0	02.08.2022	Initial Release	
1.1	31.10.2022	Content and Format Fixed	